

Security precautions for all FRITZ!Box User!

Step 1: FRITZ!Box Update:

For the successful update it is a prerequisite to be connected to the Internet.

1. Call up the user interface of the FRITZ!Box, to do this, type fritz.box (or 192.168.178.1) in your Internet browser. If necessary, log in with your user name and password.
2. Then choose the option "Assistenten".
3. Then click on "Update" or "Firmware aktualisieren".




4. Follow the instructions of the wizard. Do not disconnect the power while updating the FRITZ!Box. The update can take several minutes. Then you can use the FRITZ!Box again, after it has stopped.

Step 2: Change the FRITZ!Box password

Change the password by logging in to your FRITZ!Box. We recommend to assign a password for your own safety.

How to change the password for your FRITZ!Box:

1. Click in the user interface on „System“.
2. Then choose "FRITZ!Box-Benutzer" or "FRITZ!Box-Kennwort".
3. Then choose "Anmeldung im Heimnetz".
4. Here you can assign a new password.
- 5.

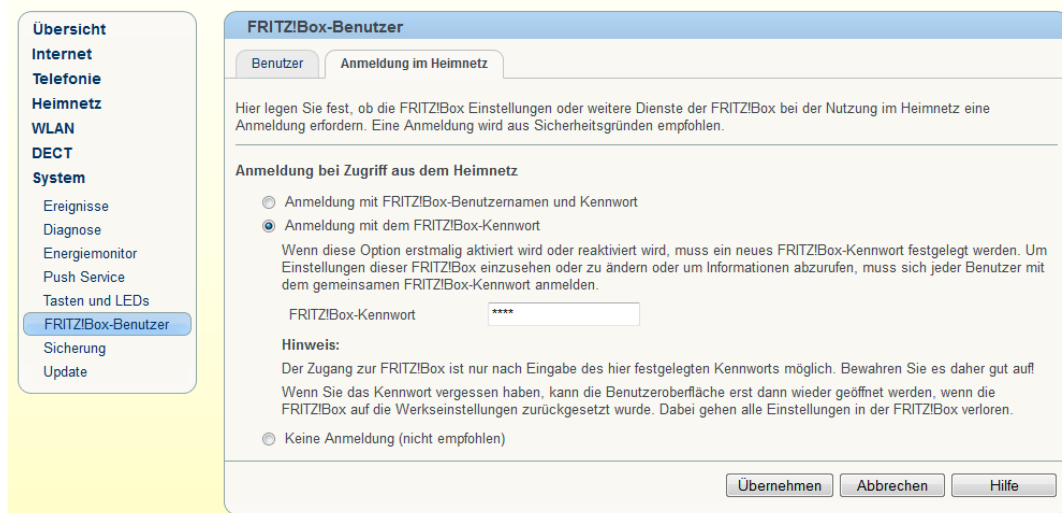

6. To save the settings click on „Übernehmen“.

Step 3: Change passwords for DSL and Telephone

After installing the update, you should change all passwords stored in the FRITZ!Box.

How to do this:

1. Use the already new assigned password through us.
2. Then click in the user interface on "Internet" then "Zugangsdaten".
3. Enter the new password (Kennwort) in the appropriate input box. Please do not change anything else here.

Zugangsdaten

Werden Zugangsdaten benötigt?

Ja

Geben Sie die Zugangsdaten ein, die Sie von Ihrem Internetanbieter bekommen haben.

Benutzername

Kennwort


Nein

Verbindungseinstellungen

Die Verbindungseinstellungen sind bereits auf die am häufigsten verwendeten Werte einstellt. Bei Bedarf können Sie diese Werte

4. To save the settings click on „Übernehmen“

How to change the password for the Internet Phone numbers:

1. Use the already new assigned password through us.
2. Then click in the user interface on "Telefonie"
3. Then choose "Eigene Rufnummern".
4. Click on the sign behind your Internet Phone Number  (Bearbeiten).

Angemeldet | [FRITZ!Box](#) | [FRITZ!NAS](#) | [MyFRITZ!](#) | 

Übersicht

Internet

Telefonie

Anrufe

Anrufbeantworter

Telefonbuch

Weckruf

Fax

Rufbehandlung

Telefoniegeräte

Eigene Rufnummern

Heimnetz

WLAN

DECT

System

Eigene Rufnummern

Rufnummern | Anschlusseinstellungen | Sprachübertragung

Auf dieser Seite können Sie Ihre eigenen Rufnummern einrichten und bearbeiten.

Status	Rufnummer	Anschluss	Anbieter	Vorauswahl		
		Internet	voip.vega-voice.de	*121#		
		Internet	voip.vega-voice.de	*122#		
		Internet	voip.vega-voice.de	*123#		

Liste drucken | Neue Rufnummer | Hilfe

5. Now insert the new password here.

The screenshot shows the 'Rufnummer bearbeiten' (Edit Number) configuration page. The page is titled 'Rufnummer bearbeiten' and contains a section for 'Anmeldedaten' (Registration Data). The 'Kennwort' (Password) field is circled in red. Other fields include 'Telefonie-Anbieter' (voip.vega-voice.de), 'Internetrufnummer', 'Anzeigename', 'Benutzername', 'Registrar' (voip.vega-voice.de), and 'Proxy-Server'. A sidebar on the left shows navigation options like 'Übersicht', 'Internet', 'Telefonie', 'Heimnetz', 'WLAN', 'DECT', and 'System'.

6. To save this settings click on „Ok“.

7. Repeat steps 3-6th for all configured Internet Phone Numbers in the router.

Step 4: Always be up to date!

We strive towards keeping you informed about possible dangers on the Internet and timely informing you about possible risks.

But you also can do something:

- Keep your FRITZ!Box up-to-date through regular updates.
- Observe safety warnings under the manufacturer's website <http://www.avm.de/de/Sicherheit/>
- Visit our homepage: www.vega-net.de

Here we will keep you updated about possible security problems.

- Protect your network with using a virus scanner.